

janser

INNOVATION



JUNIOR Ride-On

The new Compact-Class of Ride-on Floor Scrapers

JUNIOR Ride-On

Forward slope design allows for big machine performance in a very small package. Ultra heavy-duty construction normally only found on machines 2 to 3 times the size/weight

Only machine that allows slide plate to be manually positioned to desired height while seated on the machine. Ultra-safe side entrance capability. No more crawling over the front of the machine.



TECHNICAL DATA:

| | |
|---------------|-----------------------------|
| Power Supply: | 230 V |
| Motor Power: | 2,2 kW |
| Speed: | up to 37 m/min (121 ft/min) |

DIMENSIONS

| | |
|---------|---------|
| Length: | 1300 mm |
| Width: | 610 mm |
| Height: | 1000 mm |

WEIGHT

| | |
|---------------|------------------|
| Net Weight: | 320 kg (704 Lbs) |
| Side-Weights: | 80 kg (176 Lbs) |
| Gross Weight: | 400 kg (880 Lbs) |



CERAMIC REMOVAL



CARPET REMOVAL



PVC REMOVAL




PARQUET REMOVAL

DECISIVE ADVANTAGES:

- Only small machine in the industry which promotes use on all floor covering types. Yes, including Ceramic, Wood, and Epoxy.
- Excellent, unobstructed view of cutting head and working area.
- Fantastic ground clearance to clear all types of debris.
- Tapered front-end design allows for use in tight work areas like corners
- Extremely quiet operation for use in occupied office settings.

FURTHER ADVANTAGES:

- Hassle free weight system (easy access and quick to remove)
- Designed for comfort and ease of control for any sized operator, and includes adjustable control handles and foot pegs.
- Highly efficient twin pump hydraulic system.
- Unique motor design which runs with low amperage draw. This allows for longer cords and utilizes a standard wall receptical.
- Easy access, multi-position cord arm.
- Machine tie downs in front and back for safe transportation to and from the job site.

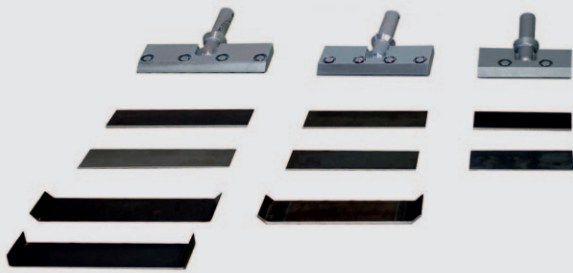

ACCESSORY PACKAGE



PATENT PENDING

Lightest Ride-On Floor Scraper with high removal rate!

FEATURE:

BENEFIT:

Working Speed up to 37 m/min
(121 ft/min)

Higher Working Speed translates into better productivity, especially on soft material removal.

Net Weight: 320 kg
Gross Weight: 400 kg

Weight matters! Sufficient Weight, perfectly balanced for strong traction and high removal rates. Weight Limitations on floors, elevators or vans are no longer an issue!

Light-Touch Steering Levers

Ensure long-hours of low effort removal work in an ergonomic body position for the operator

Zero-Turn Radius

Best manoeuvrability thanks to the independent rear-wheel hydraulic drive and front castor wheel, a combination that delivers the sought after zero turn capability. This makes it possible to realign at the end of the pass in quick time. Zero-Turn Radius increases productivity.

Best price-performance ratio

www.janser.com



Janser GmbH
Böblinger Straße 91
71139 Ehningen
Germany

Telefon: +49 7034 127-0
Telefax: +49 7034 8838
E-Mail: info@janser.com